


KASA500 EQ setting dip switch chart


Software Rev.: 10.01

Internal Amplification EQ-AMP setting

KEF CI subwoofer model	Description	Internal amp signal type	EQ-AMP dip switches setting	Low pass frequency setting
Ci3160RLb-THX	THX performance for use with a surround processor	Mono	0000 0000	Front Knob Bypass
Ci3160RLb-THX	THX performance for use with a stereo preamp	Mono	0000 1000	Front Knob Control Enabled
Ci3160RLb-THX	Reduced low frequency output to minimize room vibration.	Mono	0000 1000	Front Knob Control Enabled
Ci3160RLb-THX	THX performance for use with a surround processor	Stereo	1000 0000	Front Knob Bypass
Ci3160RLb-THX	THX performance for use with a stereo preamp	Stereo	1000 1000	Front Knob Control Enabled
Ci3160RLb-THX	Reduced low frequency output to minimize room vibration.	Stereo	1000 0000	Front Knob Control Enabled
Ci4100QLb	Normal	Mono	0000 0100	Front Knob Control Enabled
Ci4100QLb	Normal	Stereo	1000 0100	Front Knob Control Enabled

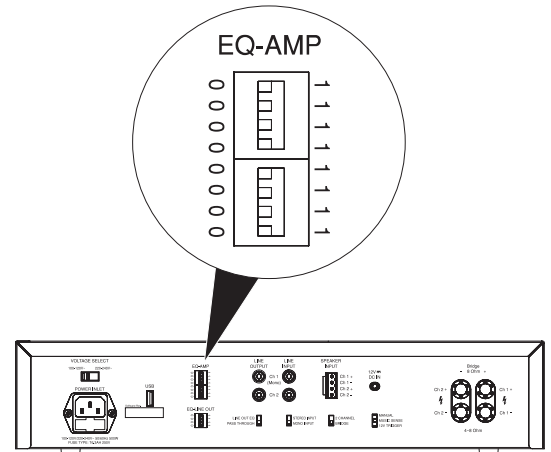

THX Calibration

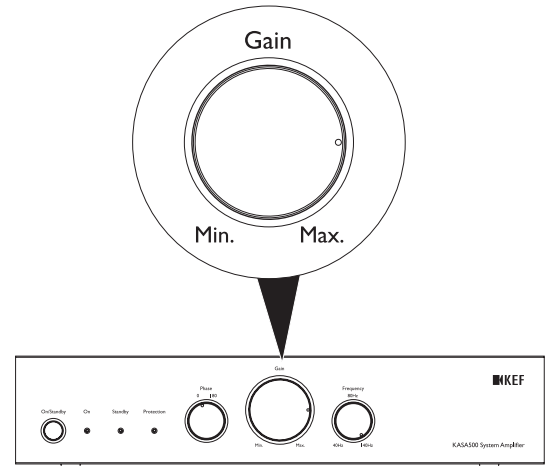

For Ci3160RLb-THX:

- (1) Set initial gain to this position for THX calibration.
- (2) Then adjust subwoofer level in the surround processor calibration menu.
- (3) Adjust gain position as needed.

Internal Amplification EQ-LINE OUT setting

Setting Description	Line output signal type	EQ-LINE OUT dip switches setting
60Hz high pass	Stereo	100
80Hz high pass	Stereo	1000
100Hz high pass	Stereo	101
120Hz high pass	Stereo	1011
Straight pass through	Stereo	1111
Straight pass through	Mono	110

